


GC-2204

4-channel relay output module

User manual

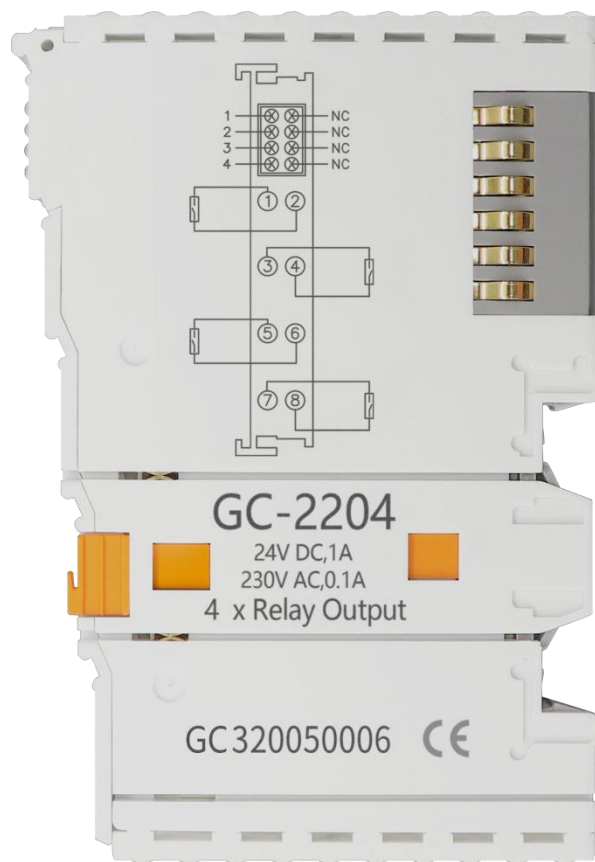

Revision History

Version	Date	Reason
V1.00	2015/09/16	Create
V2.01	2015/12/20	Modify device parameters
V3.01	2017/10/22	Add parameters
V3.10	2018/05/24	Adjust document structure
V3.11	2020/10/27	Modify product picture

Contents

1. Introduction.....	4
1.1 Overview.....	4
1.2 Properties at a glance.....	4
1.1 Typical application.....	4
2. Installation and use.....	5
2.1 Module fixing.....	5
2.2 Wiring method.....	5
2.3 System status indicator.....	7
2.4 Combined with GCAN-PLC-400/510series.....	7
2.5 Combined with GCAN- 8000series.....	8
3. Technical Specifications.....	9
4. Disclaimer.....	10
5. Module selection table.....	11
Sales and service.....	13

1. Introduction

1.1 Overview

The GC-2204 IO module has integrated 4 relay output channels, which can control the switching on and off of the relay according to instructions sent by the GCAN-PLC-400/510, GCAN-IO-8000/8100 series controllers.

1.2 Properties at a glance

- 4 relay output channels
- Rated load 1: 0.1A 230VAC
- Rated load 2: 1A 30VDC
- Electrical isolation: 500 V(GC-bus)
- Current consumption: 180mA
- No address setting, configuration via bus coupler or controller
- Suitable for all GCAN-IO-8000 series bus terminal modules
- Operating temperature: -40°C ~+85°C
- Size: 100mm*69mm*12mm

1.1 Typical application

Output relay signal according to bus coupler or controller

2. Installation and use

This chapter will describe the installation method, wiring method, meaning of the indicator and meaning of the interface of the GC-2204 module.

2.1 Module fixing

The installation method of GC-2204 module as shown in **Figure 2.1** and a flat-blade screwdriver is needed for auxiliary installation.

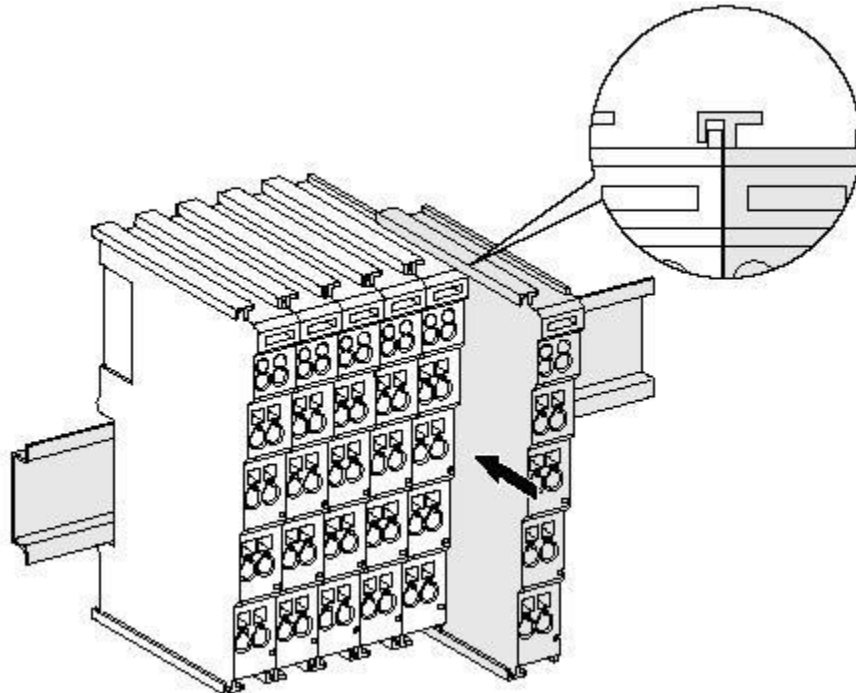


Figure 2.1 Installation of GC-2204 module

First the user need to install the GCAN-PLC on the guide rail and plug the GC-2204 along GCAN-PLC's right side until the lock is stuck. When remove the GC-2204, the user need to release the self-locking mechanism by pulling out the orange label.

Note: The GC-2204 module needs to be used with GCAN-PLC-400/510 or GCAN-8000/8100 series couplers, and can be powered directly through the coupler, so there is no need for a separate additional power supply.

2.2 Wiring method

The power wiring as shown in **figure 2.2**. First, use a flat-blade screwdriver to insert into the square hole, hold the top edge of the metal sheet in the square hole, and press toward the hole. Then, insert the wire into the hole. After plugging in, pull out the screwdriver and the wire can be firmly locked in the hole.

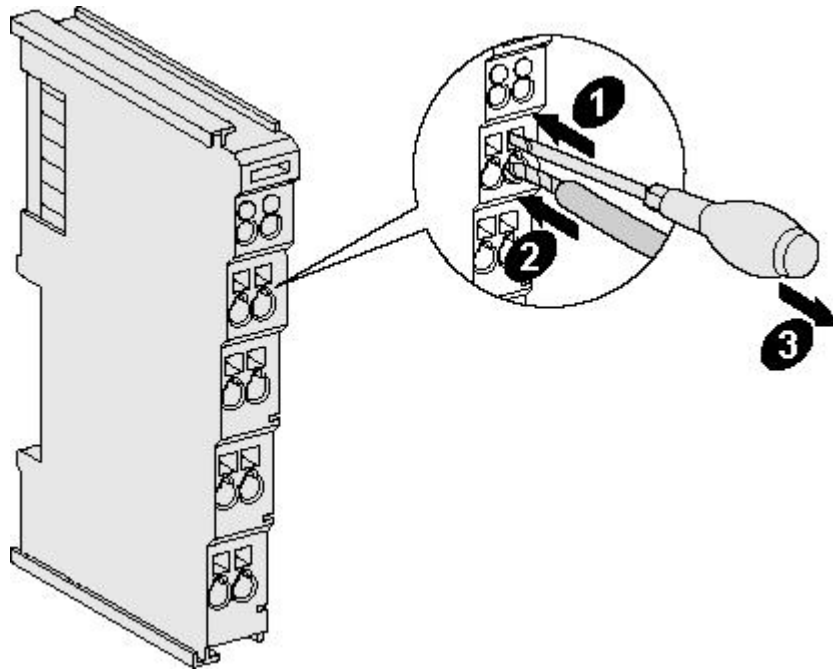


Figure 2.2 Wiring method of GC-2204 module

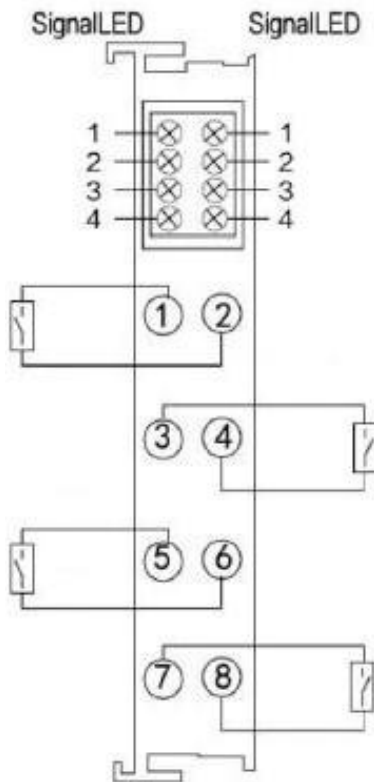


Figure 2.3 GC-2204 module terminal definition

Terminal	No	Definition
Output1	1	Relay output 1
Output2	2	
Output3	3	Relay output 2
Output4	4	
Output5	5	Relay output 3
Output6	6	
Output7	7	Relay output 4
Output8	8	

Table 2.1 GC-2204 module indicator

2.3 System status indicator

The GC-2204 module is equipped with 4 running indicator lights, which are used to indicate the running state of the equipment. The specific indication function of the indicator light is shown in Table 2.2. When the indicator light is on, the status of the GC-2204 module is shown in Table 2.3

Indicator	Color	status
RUN	green	Operation instructions

Table 2.2 Indicators of GC-2204 Module

When the output signal of the GC-2204 module is activated, the running indicator will light up.

Indicator	status	Indicator status
RUN	ON	Output signal activated
	OFF	Output signal not activated

Table 2.3 Indicator status of GC-2204 module

2.4 Combined with GCAN-PLC-400/510series

When using with GCAN-PLC-400/510, GC series IO modules shall be configured in the order of DI, DO, AI and AO, and the same type of modules shall be put together. GCAN-PLC-400/510 supports programming in five languages. The following is an example of ST language showing how to program GCAN-PLC-400 to read the state of relay output of GC-2204 module. In the process of ST programming definition, gc-2204 module needs to define variable type, output signal position, start character, delimiter and so on. For example: "DI0 AT%I0.0:BOOL;"

"0.0" represents the position of the output point, and "0.0"~"0.3" respectively define the 1-4 output points in the first GC-2204 module. When the user uses more than one

gc-2204 module, the second gc-2204 shall be defined from "1.0" to "1.3", and so on.

"%" (percent sign) is the direct variable starter; ":" (colon) is the variable or type separator.

The Boolean is read from the %I0.0 address using the symbol variable DI0. AT represents the address of the variable access and the additional attribute of the variable.

2.5 Combined with GSCAN- 8000series

The state of the digital output is represented by a byte, channel 4 in the high and channel 1 in the low.

For example, if the node number of the gcan-io-8000 module is 1, 4 channels of the first GC-2204 module should be set The output state of channel is logical "1", and the output state of other channels is logical "0", which needs to pass through the master station Gcan-io-8000 sends data, its frame ID is 0x201, the data length (DLC) is 1, and the frame data is 0x08 note that if only one gc-2204 module is used, only the first byte in the frame data is effective. The following [tables 2.4](#) and [2.5](#) list two common DO states and their corresponding status data.

DO status				
Channel	4	3	2	1
Status	1	0	0	0
CAN bus data	08			

Table 2.4 DO status when CAN bus data is 08

DI status				
Channel	4	3	2	1
Status	0	0	1	1
CAN bus data	03			

Table 2.5 DI status when CAN bus data is 03

3. Technical Specifications

Interface characteristics	
Number of outputs	4
Related load 1	0.1A 230V AC
Related load 2	1A 30V DC
Electrical isolation	500 V (GC-bus/Signal voltage)
Bit width in the process image	Output 1 byte
Installation position	In sequential order
Power supply	Powered by GCAN-PLC, current consumption 180mA
Environmental testing	
Operating temperature	-40℃~+85℃
Permissible relative humidity	95%RH, no condensation
EMC test	EN 55024:2011-09 EN 55022:2011-12
Vibration/shock resistance	EN 60068-2-6/EN 60068-2-27/29
EMC resistance burst/ESD	EN 61000-6-2 /EN 61000-6-4
Protection class	IP 20
Basic information	
Dimensions	100mm *69mm *12mm
Weight	50g

4. Disclaimer

Thank you for purchasing GCAN's GCAN series of hardware and software products. GCAN is a registered trademark of Shenyang Guangcheng Technology Co., Ltd. This product and manual are copyrighted by Guangcheng Technology. Without permission, it is not allowed to reproduce in any form. Before using, please read this statement carefully. Once used, it is deemed to be an endorsement and acceptance of the entire content of this statement. Please strictly abide by the manual, product description and related laws, regulations, policies and guidelines to install and use the product. In the process of using the product, the user promises to be responsible for his actions and all consequences arising therefrom. Guangcheng Technology will not be liable for any losses caused by improper use, installation, or modification by users. The final interpretation right of the disclaimer belongs to Guangcheng Technology

5. Module selection table

GCAN-PLC-400 series products consist of a programmable main control module, several GC series IO modules and a terminal resistance module. GC series IO modules currently include five categories: digital input, digital output, analog input, analog output, and communication extension. The specific selection table is shown in [Table 5.1](#).

I/O	Type	Characteristic	Signal	Channel
PLC Control module	GCAN-PLC-400	CPU:168M	-	-
	GCAN-PLC-510	CPU:400M	-	-
	GCAN-PLC-511	CPU:400M (2CAN)	-	-
Digital input	GC-1008	Digital input (PNP)	24V DC	8-channel
	GC-1018	Digital input (NPN)	24V DC	8-channel
	GC-1502	Counter (200kHz max)	-	2-channel
Digital output	GC-2008	Digital output (PNP)	24V DC	8-channel
	GC-2018	Digital output (NPN)	24V DC	8-channel
	GC-2204	relay output	-	4-channel
	GC-2302	PWM (20Hz~200kHz)	-	2-channel
Analog input	GC-3604	Voltage input, 16 bits	-5~+5V	4-channel
	GC-3624	Voltage input, 16 bits	10V~+10V	4-channel
	GC-3644	Current input, 16 bits	0-20mA	4-channel
	GC-3654	Current input, 16 bits	4-20mA	4-channel
	GC-3664	Voltage input, 16 bits	0~+5V	4-channel
	GC-3674	Voltage input, 16 bits	0~+10V	4-channel
	GC-3804	2-wire PT100, 16 bits	Thermal resistance	4-channel
	GC-3822	3-wire PT100, 16 bits	Thermal resistance	2-channel

	GC-3844/3854/3864	K type / S type / T type thermocouple	Thermocouple	4-channel
Analog output	GC-4602	Voltage output, 16 bits	-5V~+5V	2-channel
	GC-4622	Voltage output, 16 bits	-10V~+10V	2-channel
	GC-4642	Current output, 16 bits	0-20mA	2-channel
	GC-4652	Current output, 16 bits	4-20mA	2-channel
	GC-4662	Voltage output, 16 bits	0~5V	2-channel
	GC-4672	Voltage output, 16 bits	0~10V	2-channel
	GC-4674	Voltage output, 12 bits	0~10V	4-channel
Special module	GC-6101	RS232/RS485 extension	-	-
	GC-6201	GPRS extension	-	-
	GC-6221	4G extension	-	-
	GC-6501	WiFi extension	-	-

Table 5.1 Selection table

Sales and service



Shenyang Guangcheng Technology Co., Ltd.

Address: No.135-21, Changqing Street, Hunnan, Shenyang, Liaoning, China.

E-mail: sygckj@gmail.com

Tel/ Whatsapp: +86 13644001762

Skype: live:sygckj

WeChat: gckj777

Website: www1.gcanbox.com