

## 250-500W, Wide Range Input, Non-isolated, DIN Rail DC-DC Converters



Industrial



Test



Semi-Fab



The DDA DIN rail mount, non-isolated step-down converters are ideal for creating additional high current output voltages from a single output 12V, 24V or 48V AC-DC power supply. The highly efficient DDA series accepts a very wide DC input and has a wide output adjustment range, with a choice of single or dual output models.

Features	Benefits
• 250W Single Output, 325W and 500W Dual Output Power Levels	• High Power Density
• High Efficiency up to 95%	• Less Waste Heat
• Wide Input Range - 9 up to 53V	• One Part For Multiple Applications
• Wide 3.3 to 24V Output Adjustment	• Accommodates Non-Standard Voltages
• Narrow 36.5mm Width	• More Space Available For Other DIN Rail Devices
• Convection Cooled	• Easy To Cool In End System

### Model Selector

Part Number	Output Voltage 1		Outage Voltage 2		Maximum Output Current	Maximum Output Power
	Nominal (V) <sup>(1)</sup>	Adjust Range (V)	Nominal (V) <sup>(1)</sup>	Adjust Range (V)		
DDA250N-S1PX-12-001	12V	3.3 to 15V	NA	NA	20A / NA	250W / NA
DDA500N-D2PP-1205-001	12V	3.3 to 15V	5V	3.3 to 15V	20 / 20A	250W / 250W
DDA325N-D2PN-1212-001	12V	3.3 to 24V	-12V	-3.3 to -24V	14 / 8A	250W / 75W

Consult factory for other output voltage combinations.

### Specification

Model(s)		DDA250	DDA500	DDA325
<b>Input</b>				
Input Voltage range	Vdc	9 to 53V (Turn on at 10V or greater)		9 to 40V (Turn on at 10V or greater)
Input Current (Max.)	A	20A	40A	35A
Efficiency	-	92 - 95%		88 - 94%
Safety Agency Certifications	-	IEC/UL/CSA/EN 62368-1, CE Mark (LVD, EMC, RoHS)		
<b>Output</b>				
Switching Frequency	kHz	400		
Line Regulation	mV	25mV	20mV	
Load Regulation	mV	150mV	100mV	
External Load Capacitance	uF	0 - 1000uF each output voltage		
Output Ripple & Noise (pk-pk)	mV	60mV	50mV each output voltage	
Overcurrent Protection Threshold	A	28A	22 / 15A	
Overvoltage Protection	V	None		
Remote On / Off	-	To enable the output(s), connect the on/off pins to the GND pin(s) on the top connector		
Remote Sense	-	(+) Sense, compensating up to 5% of output voltage		
Power Good	-	Open collector(s), low on fail		
Indicators	-	A green LED indicates the output is OK		
Parallel Operation	-	Not possible		
Series operation	-	Not possible		


Specification			
Model(s)	DDA250	DDA500	DDA325
<b>Environmental</b>			
Operating Temperature	°C	-40 to 100 (see full technical datasheet on website)	
Storage Temperature	°C	-55 to 125	
Cooling	-	Convection or forced air	
<b>Other</b>			
MTBF - Telcordia SR-332	-	>5Mhrs; 100% Load, Ta = 40°C	
Weight	g	450	
Size (WxHxD)	mm	36.5 x 123.4 x 115	
Size (WxHxD)	In	1.44 x 4.86 x 4.53	
Case Material	-	Metal	
DIN Rail type	-	Suitable for mounting on DIN Rail TS-35/7.5 or TS35/15	
Warranty	yrs	3	

See website for detailed specifications, test methods and installation manual.


(1) Output voltage cannot exceed input voltage (see graphs below).

(2) For Output Derating, check the Installation Manual and detailed Specifications.


### Output vs. Input Voltage Operating Range

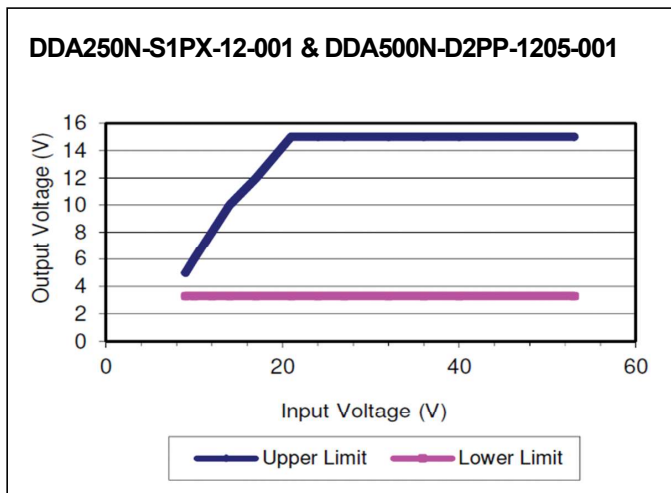

### Output vs. Input Voltage Operating Range

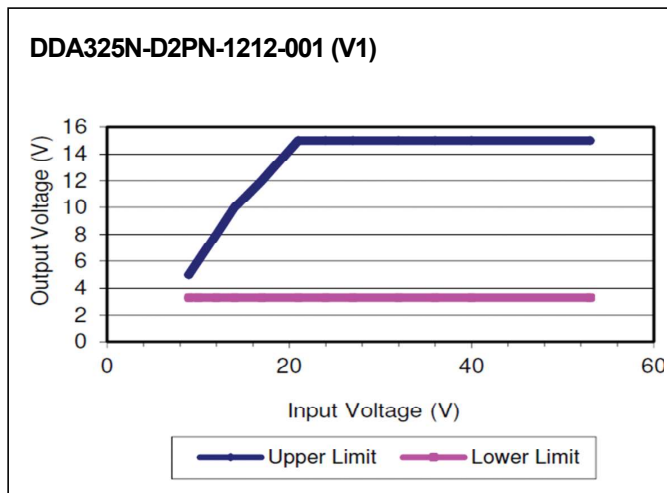


### Output vs Input Voltage Operating Range

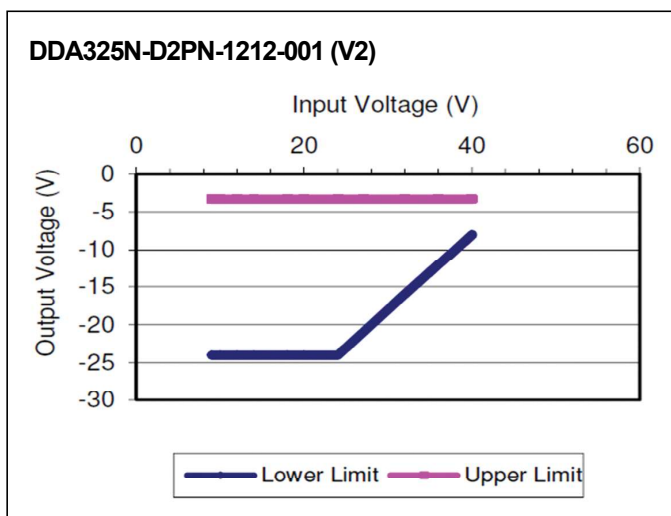

## Mechanical Specification

### Recommended Hole Pattern (top view)

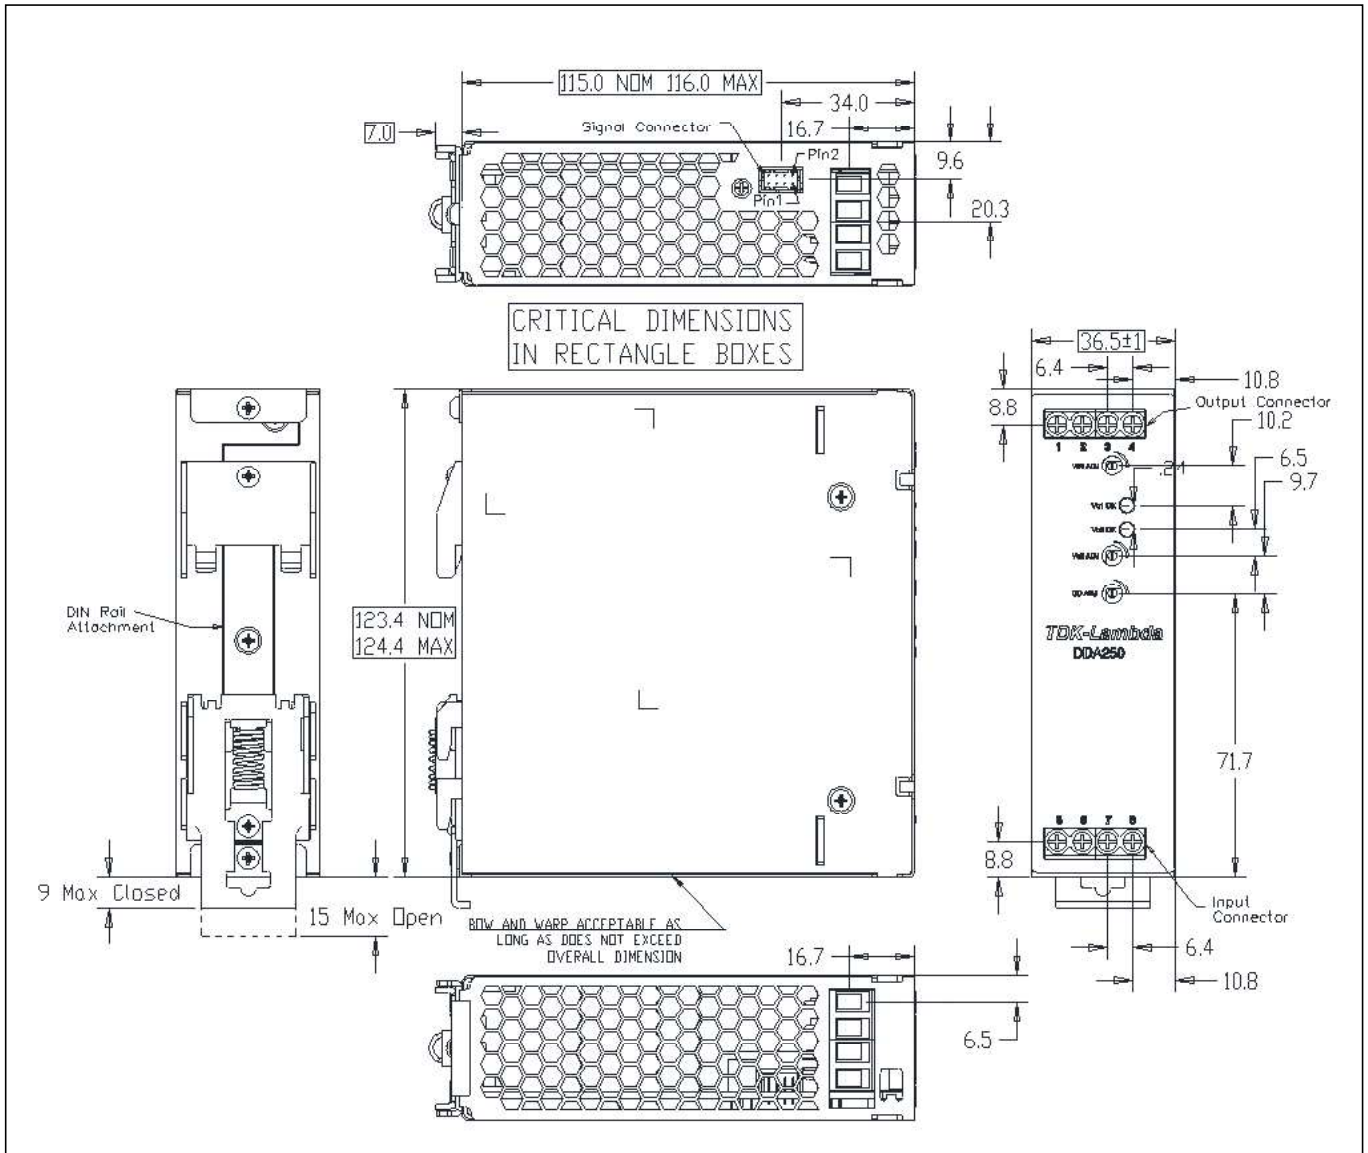

#### Front Panel Connectors

#	Function	#	Function
1	Vo2 (-)	5	On/Off Vo2
2	Vo2 (+)	6	On/Off Vo1
3	Vo1 (-)	7	VIN (-)
4	Vo1 (+)	8	VIN (+)

#### Signal Collector Pinout

PIN	Function	PIN	Function
1	Vo1 SENSE (+)	5	Vo1 PWR GOOD
2	Vo2 SENSE (+)	6	Vo2 PWR GOOD
3	N/C	7	CC Ref (N/C)
4	Signal GND	8	Signal GND



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info.germany@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
powersolutions@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tfs.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.lambda.tdk.com

