



### EXTENDED BATTERY MODULE TO PROLONG RUNTIME WITH HOT-SWAPPABLE DESIGN

#### The battery module allows users to perform battery maintenance without interruption



Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The products feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.

#### SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

#### PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . Input Connector
- 3 . Output Cable
- 4 . DC Breaker

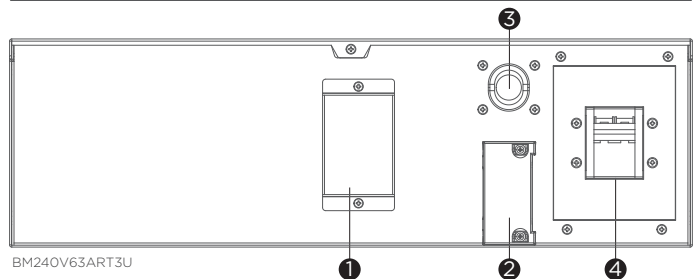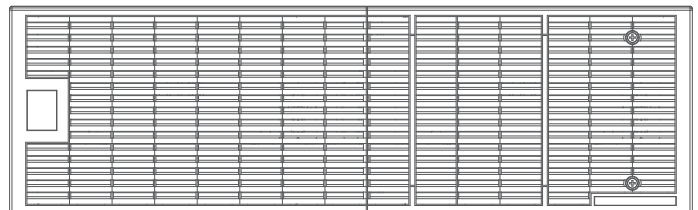

BM240V63ART3U

#### TECHNICAL SPECIFICATIONS

Model Name	BM240V63ART3U
<b>General</b>	
Nominal Output Voltage (Vdc)	240
Rated Output Current (A)	63
<b>Battery</b>	
Battery Type	Sealed Lead-acid
Battery Quantity	20
Single Battery Voltage ( V )	12
Single Battery Capacity ( AH )	9
Built-in Charger	No
User-replaceable	Yes
Hot-swappable	Yes
Parallel Expansion (Max. Units)	8
Replacement Battery Pack Quantity (pcs)	2
Compatible UPS Models	RT33020KE, RT33025KE, RT33030KE
<b>Physical</b>	
Form Factor	Rack/Tower
<b>Physical Size</b>	
Dimensions (WxHxD) (mm.)	433 x 132 x 660
Weight (kg.)	78
Installed Rack Height (U)	3
<b>Environmental</b>	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
<b>Certifications</b>	
Certifications*	RCM
RoHS	Yes

\*Certifications may vary according to different regions. Visit [www.cyberpower.com](http://www.cyberpower.com) for more information.  
#All specifications are subject to change without notice.

