

AHM100 Series



- Medical & IT Safety Approvals
- Energy Star Level V
- CEC 2008 & EISA 2007 Compliant
- IP22 Environmental Rating
- Compact Format 6.50" x 2.52" x 1.46"
- <0.5 W Standby Power
- 100 W – Convection Cooled Ratings
- Class I & Class II Models
- 0 °C to +60 °C Operation
- Very Low Earth Leakage Current
- 3 Year Warranty

The AHM100 series of medical external power supplies is fully approved to international medical safety standards. It has been designed with very high efficiency and low standby power, enabling it to meet the latest environmental legislation. The unit has a fully sealed enclosure complying with IP22 and a smooth surface finish making it easier to wipe down in a clinical setting. With approvals for class I and II the product is suitable for hospital, home healthcare and portable medical device applications.

Models and Ratings - Convection-cooled

Output Power	Output Voltage V1	Max Output Current	Peak ⁽²⁾	Model Number ⁽¹⁾
100 W	12.0 VDC	8.33 A		AHM100PS12
100 W	15.0 VDC	6.67 A		AHM100PS15
100 W	19.0 VDC	5.26 A		AHM100PS19
90 W	24.0 VDC	3.75 A	7 A	AHM100PS24P ⁽³⁾
100 W	24.0 VDC	4.16 A		AHM100PS24
100 W	48.0 VDC	2.08 A		AHM100PS48
100 W	12.0 VDC	8.33 A		AHM100PS12C2
100 W	15.0 VDC	6.67 A		AHM100PS15C2
100 W	19.0 VDC	5.26 A		AHM100PS19C2
90 W	24.0 VDC	3.75 A	7 A	AHM100PS24C2P ⁽³⁾
100 W	24.0 VDC	4.16 A		AHM100PS24C2
100 W	48.0 VDC	2.08 A		AHM100PS48C2

- Notes:**
1. Models with suffix 'C2' have a Class II equipment protection classification.
 2. Maximum peak duration 300 ms, average power must not exceed 90 W.
 3. Peak models are not standard product. Contact sales for details and availability.
 4. For optional input connector retention clip, add suffix '-A' to the model number e.g. AHM100PS24C2-A.

Input Characteristics


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage - Operating	80	115/230	264	VAC	Full power 90 VAC to 264 VAC. Derate output power linearly by 20% from 90 VAC to 80 VAC.
Input Frequency	47	50/60	63	Hz	
Power Factor		>0.9			EN61000-3-2 class A & D compliant & Energy Star Compliant
Input Current - No Load		0.05/0.09		A	115/230 VAC
Input Current - Full Load		1.0/0.5		A	115/230 VAC
Inrush Current		60-80	120	A	230 VAC cold start, 25 °C
No Load Input Power		0.3/0.4	0.5	W	115/230 VAC
Earth Leakage Current		50/85	180	µA	115 V 60 Hz/230 V 50 Hz (Typ.), 264 VAC/60 Hz (Max.)
		0.3/0.6		mA	115/230 VAC/400 Hz
Input Protection	T2.5A/250 V internal fuse in both lines				

Output Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage - V1	12		48	VDC	See Models and Ratings table
Output Voltage Adjustment				%	No user adjustment
Minimum Load	0			A	
Start Up Delay		200/100		ms	115/230 VAC full load (see fig.1)
Hold Up Time		20		ms	115/230 VAC full load (see fig.2)
Drift			±0.2	%	After 20 min warm up
Line Regulation			±0.5	%	90-264 VAC (50% load)
Load Regulation			±3	%	0←50→100% load.
Transient Response - V1			5	%	Recovery within 1% in less than 500 µs for a 50-75% and 75-50% load step
Over/Undershoot - V1		3		%	
Ripple & Noise		<1	1.5	% pk-pk	20 MHz bandwidth with external circuit (see fig.3-6)
Overvoltage Protection		125		%	Vnom, Recycle AC to reset
		13.2	18	VDC	AHM100PS12 & C2
		16.5	22		AHM100PS15 & C2
		21.0	28		AHM100PS19 & C2
		26.4	33		AHM100PS24 & C2
	52.8	59	AHM100PS48 & C2		
Overload Protection		115.0	175	%	I nom, Auto reset
		10.0	14.0	A	AHM100PS12 & C2
		8.0	11.4		AHM100PS15 & C2
		6.3	9.0		AHM100PS19 & C2
		5.0	7.1		AHM100PS24 & C2
	2.5	3.6	AHM100PS48 & C2		
Short Circuit Protection					Continuous, trip & restart (hiccup mode)
Temperature Coefficient			0.05	%/°C	
Overtemperature Protection				°C	Connected to transformer. Auto reset.


Start Up Delay From AC Turn On

Figure 1
Start up example from AC turn on
(230 VAC, 95 ms)

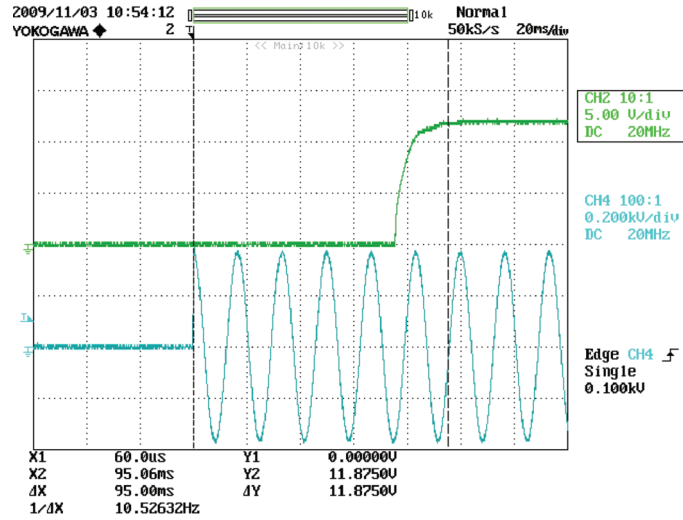

Hold Up Time From Loss of AC

Figure 2
Hold up example at 100 W load
with 230 VAC input (25 ms)

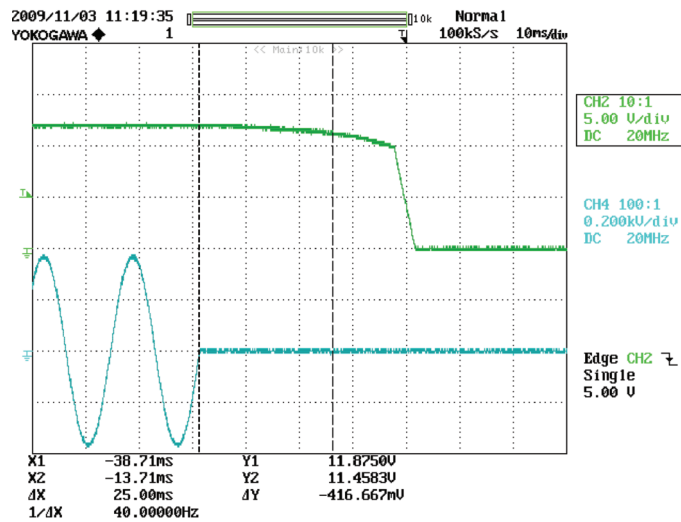

Ripple & Noise

Figure 3
AHM100PS12
Ripple & noise example at 100 W load
with 230 VAC input (58 mV)

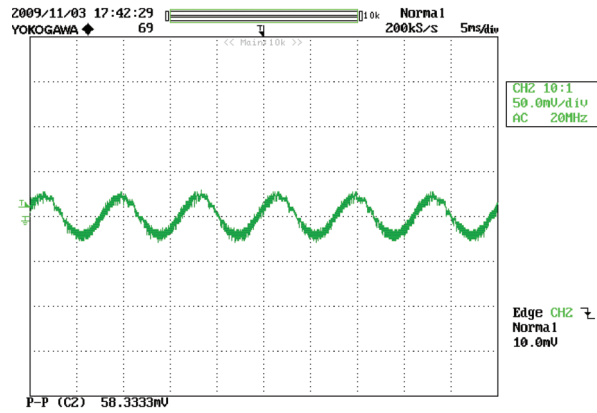


Figure 4
AHM100PS24
Ripple & noise example at 100 W load
with 230 VAC input (258 mV)

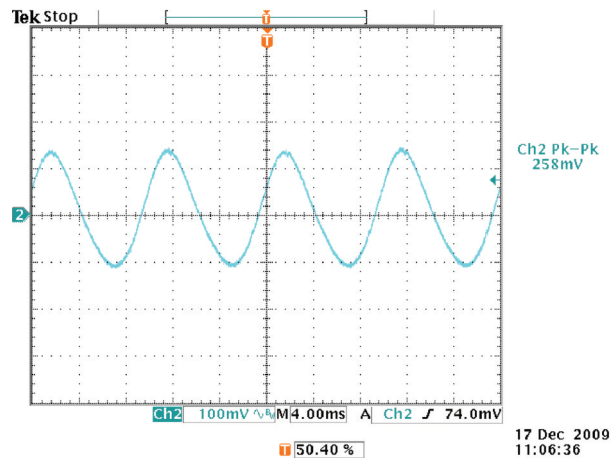


Figure 5
AHM100PS48
Ripple & noise example at 100 W load
with 230 VAC input (318 mV)


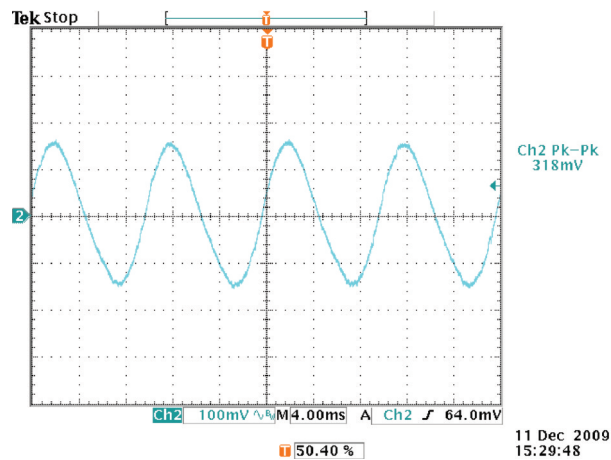


Figure 6
Ripple & noise measurement circuit

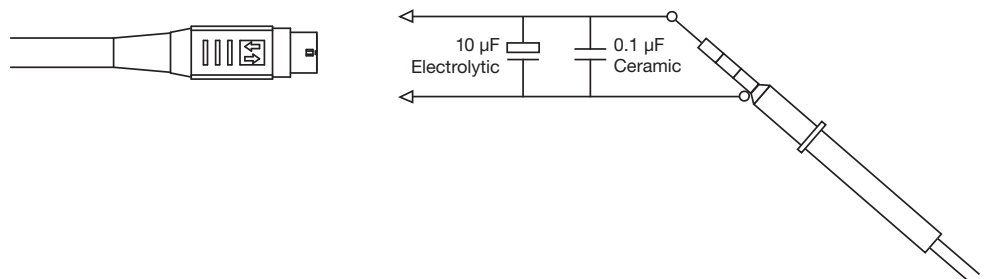

General Specifications

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		92		%	Full load (see fig.7-9)
Isolation: Input to Output Input to Ground Output to Ground	4000			VAC	
	1500			VAC	Class I Models
	500			VAC	Class I Models
Switching Frequency	45		200	kHz	PFC stage
	90		110		DC-DC stage
Power Density			4.4	W/in ³	
Mean Time Between Failure		153		kHrs	MIL-HDBK-217F, Notice 2 +25 °C GB
Weight		1.1 (500)		lb (g)	

Average Active Efficiency



Characteristic	Average Active Efficiency		Units	Notes & Conditions
	115 V / 60 Hz	230 VAC / 50 Hz		
AHM100PS12 & C2	90.52	90.32	%	As per Energy Star Level V test procedure
AHM100PS15 & C2	89.88	89.64		
AHM100PS19 & C2	89.99	89.74		
AHM100PS24 & C2	91.67	91.43		
AHM100PS48 & C2	91.80	91.63		

Efficiency Versus Load

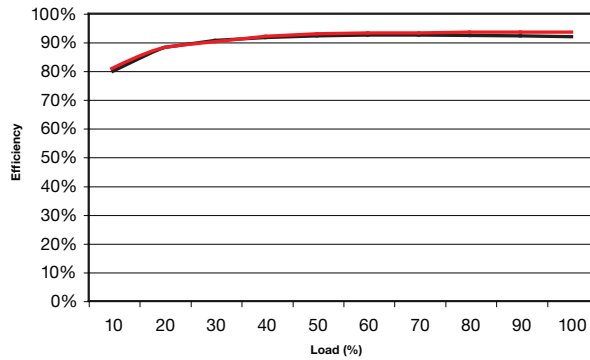


Figure 7 - AHM100PS12

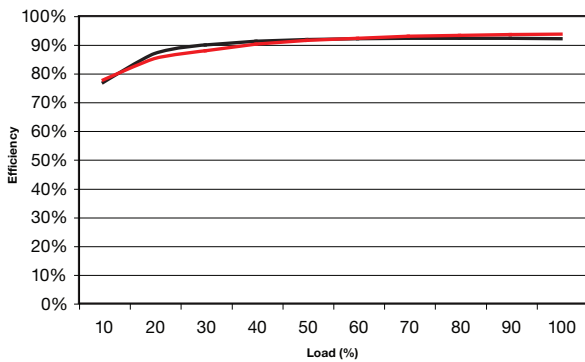


Figure 8 - AHM100PS24


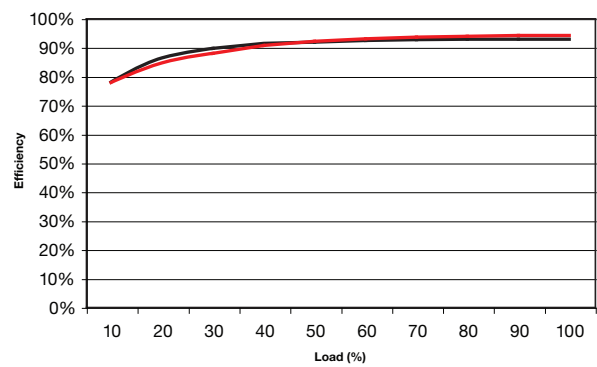


Figure 9 - AHM100PS48




Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	0		+60	°C	Derate linearly to 60% load at 60 °C from +40 °C. (See fig.10)
Case Temperature (IEC60601 3rd Edition)			71	°C	100% Load, with TAMB +40 °C
			60		80% Load Maximum, with TAMB +40 °C
			48		10% Load Maximum, with TAMB +40 °C
Storage Temperature	-40		+85	°C	
Cooling					Convection cooled, see fig.10
Humidity	5		95	%RH	Non-condensing
Operating Altitude			3000	m	
Ingress Protection	IP22				
Shock					3 x 30 g/11 ms shocks in both +ve & -ve directions along the 3 orthogonal axis, total 18 shocks.
Vibration					Three axis 5-500 Hz at 2 g x 10 sweeps

Derating Curve

Figure 10

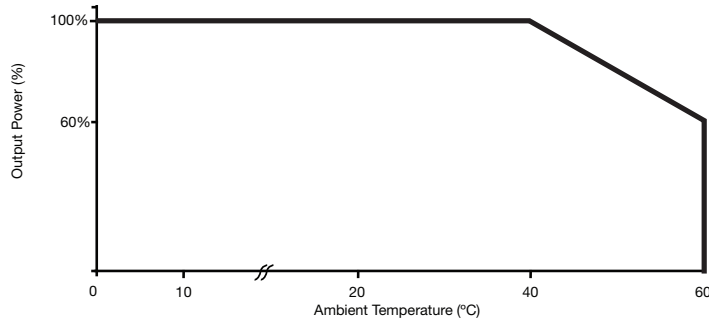

Electromagnetic Compatibility - Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Low Voltage PSU EMC	EN61204-3	High severity level	as below	
Harmonic Current	EN61000-3-2	Class A		
ESD	EN61000-4-2	3	A	
Radiated	EN61000-4-3	3	A	
EFT	EN61000-4-4	3	A	
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	
Magnetic Field	EN61000-4-8	3	A	
Dips and Interruptions	EN61000-4-11	Dip: 30% 500 ms	A	
		Dip: 60% 200 ms	B	
		Dip: 80% 5000 ms	A	
		Dip: 100% 5000 ms	B	
	EN60601-1-2	Dip: 30% 25 AC Cycles	A	230 VAC 100% load, 100 VAC 80% load
		Dip: 60% 5 AC Cycles	A	230 VAC 100% load, 100 VAC 15% load
		Dip: 100% 0.5 AC Cycles	A	
	Int.: >95% 5000 ms	B		

Electromagnetic Compatibility - Emissions

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Conducted	EN55011/32	Class B		
Radiated	EN55011/32	Class B		
Voltage Fluctuations	EN61000-3-3			

Safety Agency Approvals

Safety Agency	Safety Standard	Category
CB Report	IEC60950-1 & IEC62368-1	Information Technology
UL	UL62368-1, CSA62368-1 via cUL	Information Technology
TUV	EN62368-1	Information Technology
Denan Japan	PSE Certificate	
CE	LVD	

Safety Agency	Safety Standard	Category
CB Report	IEC60601-1 including Risk Management	Medical
UL	ANSI/AAMI ES60601-1 & CSA60601-1 via cUL	Medical
TUV	EN60601-1	Medical

Means of Protection		Category
Primary to Secondary	2 x MOPP (Means of Patient Protection)	IEC60601-1 Ed 3
Primary to Earth	1 x MOPP (Means of Patient Protection)	
Secondary to Earth	1 x MOPP (Means of Patient Protection)	





Equipment Protection Class	Safety Standard	Notes & Conditions
Class I & Class II	IEC62368-1 & IEC60601-1	See safety agency conditions of acceptability for details

Environmental Legislation

Authority	Location	Date	Notes & Conditions
EISA	US	2007	
CEC	California, US	2008	
Energy Star	US	2008	Level V
ErP Directive	Europe	2011	Regulation No. 278/2009

Mechanical Details

Weight: 1.1 lbs (500 g)
 Dimensions shown in inches (mm).

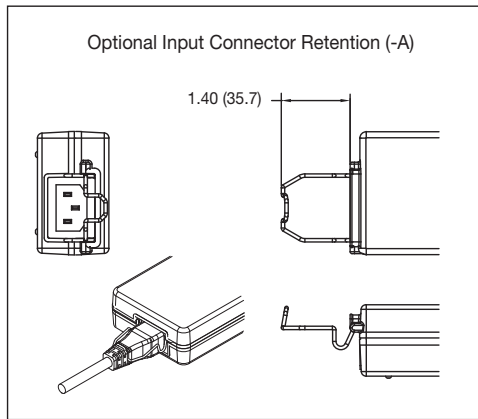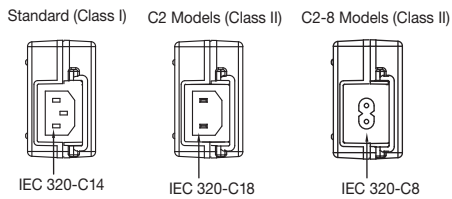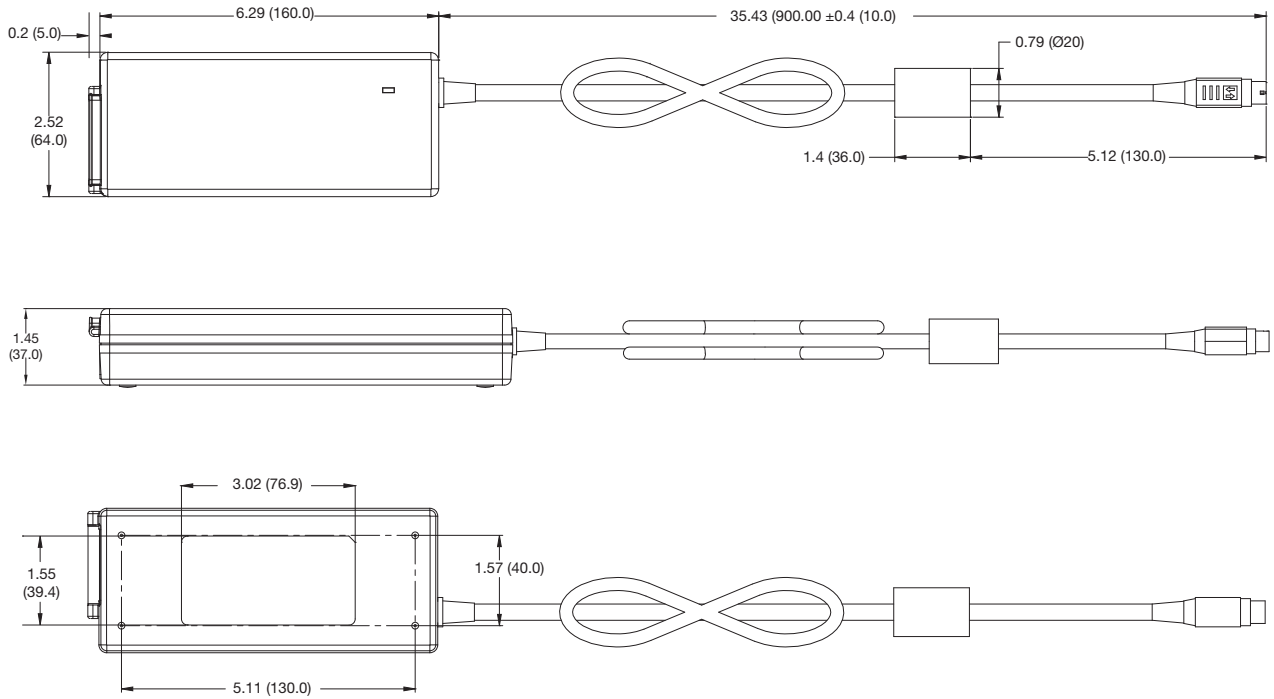

Output Connector equivalent to KPPX-4P (Non Locking)	
Pin 1	Output +
Pin 2	Output +
Pin 3	Return
Pin 4	Return
Outer Shell	GND*
Outer Shell C2 Models	Floating

* Functional earth.