

### 15 Watts

- Energy Efficiency Level VI
- European CoC Tier 2
- <0.075 W Standby Power
- Single Outputs 5 to 48 V
- 0 °C to 60 °C Operation
- Universal Input
- 3 Year Warranty



#### Dimensions:

**AEK15:**  
3.58 x 1.50 x 1.42" (91.0 x 38.0 x 36.0 mm)


### Models & Ratings

Output Power	Output Voltage	Output Current	Total Regulation	Ripple & Noise <sup>(2)</sup>	Efficiency <sup>(1)</sup>	Model Number <sup>(3)</sup>
12 W	5.0 V	2.40 A	±5%	60 mV	80%	AEK15US05
	8.0 V	1.50 A		110 mV	84%	AEK15US08
15 W	9.0 V	1.66 A		110 mV	84%	AEK15US09
	12.0 V	1.25 A		130 mV	84%	AEK15US12
	15.0 V	1.00 A		150 mV	84%	AEK15US15
	18.0 V	0.33 A		150 mV	84%	AEK15US18
	24.0 V	0.62 A		200 mV	84%	AEK15US24
	30.0 V	0.50 A		200 mV	85%	AEK15US30
	36.0 V	0.41 A		250 mV	86%	AEK15US36
	48.0 V	0.31 A		250 mV	86%	AEK15US48

### Notes

1. Typical average of efficiencies measured at 25%, 50%, 75% and 100% load and 230 VAC input.
2. Pk Pk value measured with 20 MHz bandwidth and 0.47 µF ceramic capacitor.
3. Standard input connector is IEC320-C14 inlet. For optional IEC320-C6 inlet add suffix C6 to model number, e.g. AEK15US12C6.

### Mechanical Details

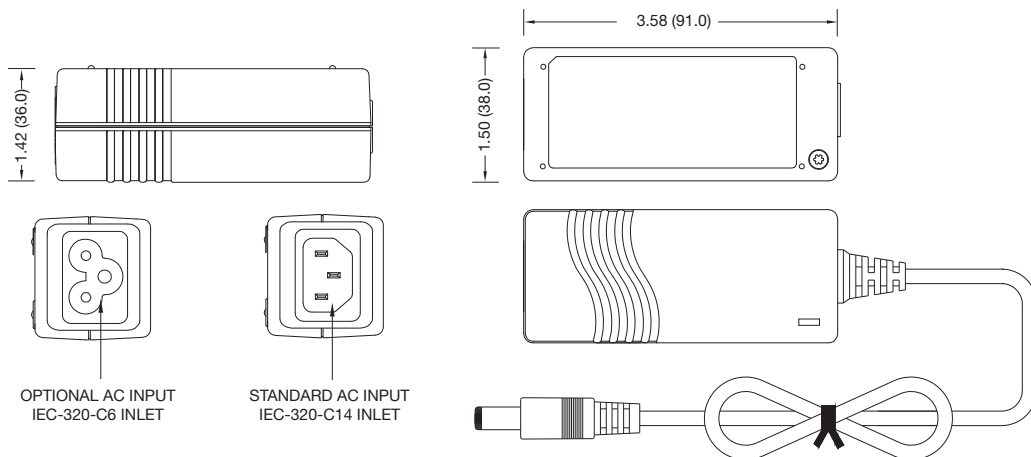

### Notes

1. All dimensions shown in inches (mm).
2. Weight: 0.36 lbs (165 g) approx.
3. Tolerance is ±0.02 (±0.5) maximum, except output cable length which is ±2" (±50 mm)
4. Output connector is 5.5 mm dia. outer barrel, inner dia. is 2.5 mm with a center + and outer shell - polarity.
5. Cable length: 5 & 18 V: 48" (1220 mm) 18 AWG  
Others: 48" (1220 mm) 20 AWG

### Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	90		264	VAC	
Input Frequency	47		63	Hz	
Input Current		0.4/0.16		A	Measured at 100 VAC/240 VAC
Inrush Current			40	A	230 VAC, cold start at 25 °C
Leakage Current			0.75	mA	240 VAC, 60 Hz
No Load Input Power			75	mW	150 mW for 24 V and 48 V models
Input Protection	T2.0A/250 VAC internal fuse in line				


### Output

Characteristic	Min.	Typ.	Max.	Units	Notes & Conditions
Output Voltage	5		48	VDC	See Models and Ratings table
Initial Set Accuracy			±2	%	At 60% load
Minimum Load					No minimum load required
Start Up Delay			2	s	
Hold Up Time	8			ms	Full load and 115 VAC
Line Regulation			±1	%	From minimum to maximum input voltage at full load
Load Regulation			±4	%	Load regulation measured from 10% to 100% load
Transient Response			5	%	Maximum deviation, recovering to less than 1% within 500 µs for 25% step load
Ripple and Noise				mV pk-pk	See Models and Ratings table
Overshoot		5		%	At turn on / turn off
Short Circuit Protection	Trip and restart (hiccup), auto resetting				
Temperature Coefficient		0.04		%/°C	

### Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	0		+60	°C	Derate from 100% load at 40 °C to 67% load at 60 °C
Cooling	Natural convection				
Operating Humidity	0		95	%RH	Non-condensing
Storage Temperature	-40		+85	°C	
Operating Altitude			2000	m	
Shock	IEC68-2-27, 30 g, 11 ms half sine, 3 times in each of 6 axes				
Vibration	IEC68-2-6, 10-500 Hz, 5 g 10 mins/sweep, 60 mins for each of 3 axes				

### Derating Curve

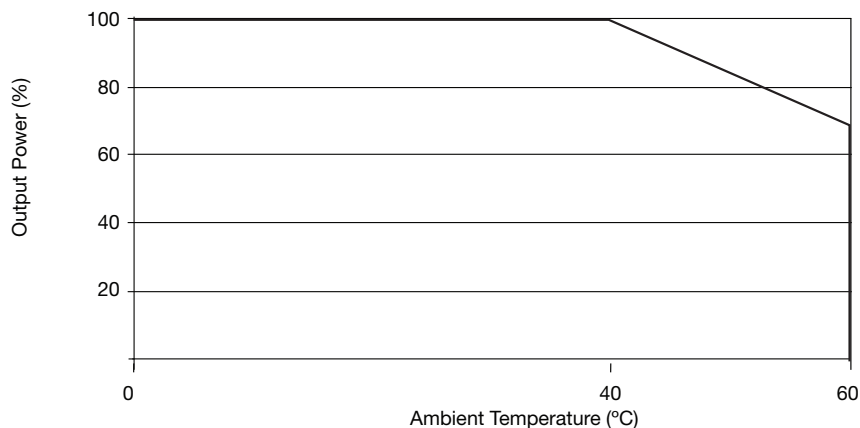


### General


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		84		%	See Models and Ratings table and curves.
Isolation: Input to Ground	1500			VAC	
Isolation: Input to Output	3000			VAC	
Isolation: Output to Ground	500			VDC	
Switching Frequency		65		kHz	
Power Density		1.96		W/in <sup>3</sup>	
Mean Time Between Failure	100			kHrs	MIL-HDBK-217F at 25 °C GB
Weight		0.36 (165)		lb (g)	

### Efficiency Curves

#### AEK15US12

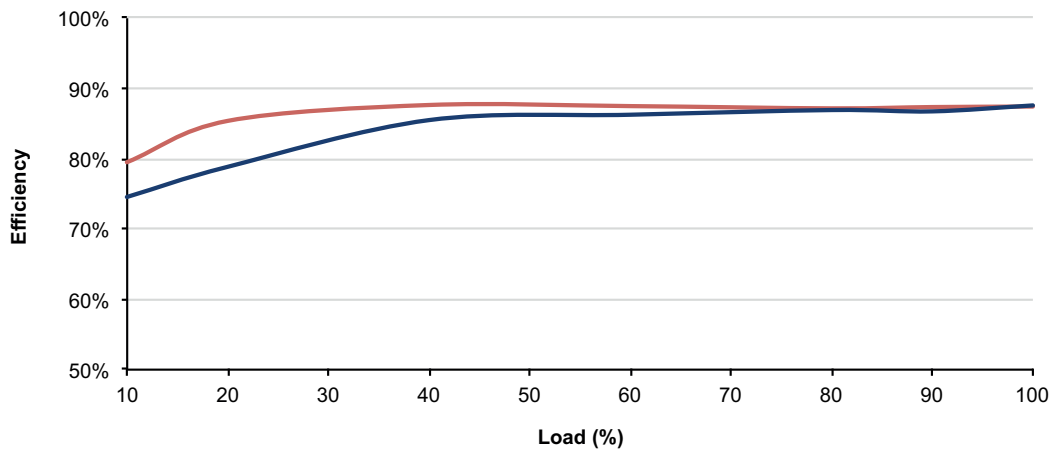

#### AEK15US24

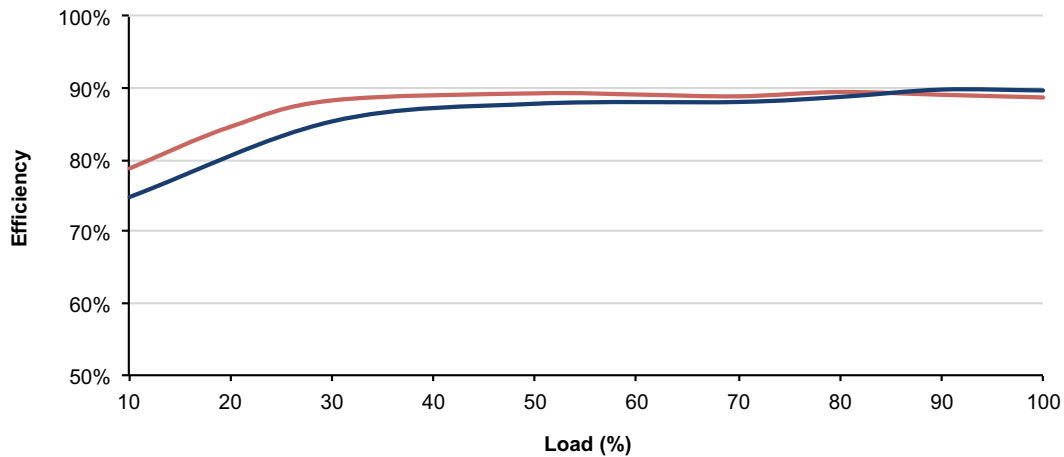

### EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Emissions	EN55032	Level B	Conducted & Radiated
Harmonic Current	EN61000-3-2	Class A	
Voltage Flicker	EN61000-3-3		


### EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	±8 kV Air, ±4 kV contact	A	
Radiated	EN61000-4-3	3 V/m	A	
EFT/Burst	EN61000-4-4	2	A	
Surge	EN61000-4-5	Installation Class 3	A	
Conducted	EN61000-4-6	3 V	A	
Magnetic Fields	EN61000-4-8	3 A/m	A	
Dips and Interruptions	EN61000-4-11	Dip: 30% 10 ms	A	High Line/Low Line
		Dip: 60% 100 ms	A/B	
		Int: 100% 5000 ms	B	

### Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
UL	UL62368-1	
TUV	EN62368-1	
CB	IEC60950-1	

### Mechanical Details

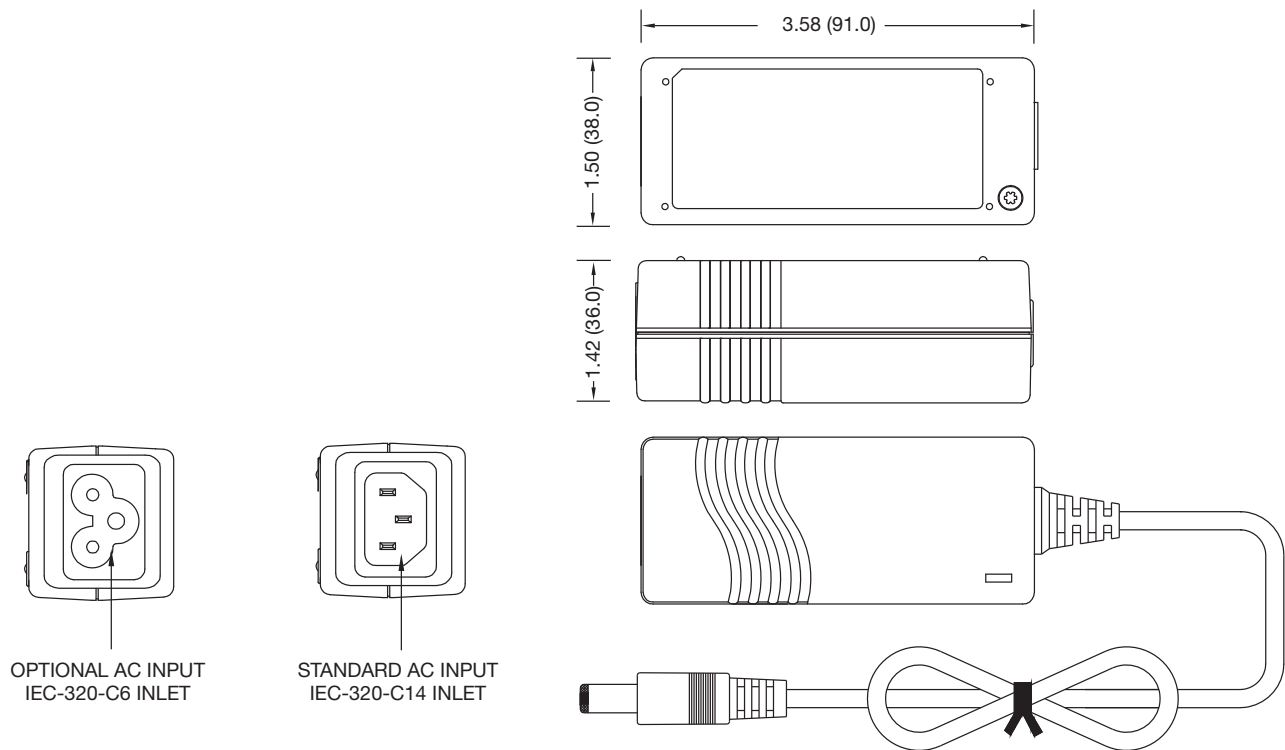

### Notes

- All dimensions shown in inches (mm).
- Weight: 0.36 lbs (165 g) approx.
- Tolerance is  $\pm 0.02$  ( $\pm 0.5$ ) maximum, except output cable length which is  $\pm 2$ " ( $\pm 50$  mm)
- Output connector is 5.5 mm dia. outer barrel, inner dia. is 2.5 mm with a center + and outer shell - polarity.
- Cable length: 5 & 18 V: 48" (1220 mm) 18 AWG  
Others: 48" (1220 mm) 20 AWG