



## 1500W Medical and Industrial Power Supplies

Features	Benefits
• Enclosed Compact Construction	• Easy Installation
• Class B Conducted & Radiated EMI	• Simpler System Filtering
• Variable Speed Fan	• Quieter Operation
• Medical and Industrial Certifications	• Easier System Compliance
• 7 Year Warranty	• Lower Cost of Ownership




Specification		CUS1500M
Model		CUS1500M
AC Input Voltage range <sup>(1)</sup>	VAC	85 - 265VAC (47 - 63Hz)
DC Input Voltage range *	VDC	120 - 340VDC*
Inrush Current (100 / 200VAC)	A	60 / 60A
Power Factor (100 / 200VAC)	-	Meets EN61000-3-2 (0.98 / 0.95)
Input Current (115/230VAC) (Typ)	A	16 / 8A
Temperature Coefficient	%/°C	<0.02%/°C
Regulation	-	See Model Selector
Overcurrent Protection	-	>105%, Constant Current Style. After 5s unit will shutdown
Overvoltage Protection	V	125-150% (115-125% for 48V), Cycle AC line to reset
Hold Up Time (Typ at 100% load)	ms	20ms
Leakage Current (max)	mA	<0.3mA
Standby Voltage	A	5V 1A (always on)
Remote Sense	-	Yes
Remote On/Off	-	Yes. Apply external or Standby voltage to enable output voltage
DC Good, Fan Alarm	-	Open collector signal, high on fail
Parallel Operation	-	Yes, up to 5 units
Series Operation	-	Yes
Operating Temperature	°C	-20°C to +60°C, derate linearly to 60% load from 50°C to 60°C Reverse air (/RF): -20°C to +70°C, derate linearly to 50% load from 50°C to 70°C
Storage Temperature	°C	-30°C to +75°C
Operating Humidity (non condensing)	%RH	20 - 90%RH
Storage Humidity (non condensing)	%RH	10 - 90%RH
Cooling	-	Internal variable speed fan, air intake from front. <45dBA noise
Withstand Voltage	VAC	Input to Ground 2kVAC (1xMoPP), Input to Output 4kVAC (2xMoPP), Output to Ground 1.5kVAC (1xMoPP) for 1 min.
Isolation Resistance	MΩ	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> (sweep 1 min) X, Y, Z for 1 hour
Shock	-	< 196.1 m/s <sup>2</sup>
Safety Agency Certifications	-	IEC/ES/EN/CSA60601-1, IEC/UL/EN/CSA60950-1, IEC/UL/EN62368-1 EN62477-1 (OVC III), CE Mark
Line Dips	-	SEMI-F47 (200VAC input)
Conducted & Radiated EMI	-	EN55011 / EN55032-B, FCC Class B, VCCI-B
Immunity	-	IEC61000-4-2, -3, -4, -5, -6, -8, -11, IEC61000-6-2, IEC60601-1-2 Ed.4
Weight (Typ)	g	3,000g
Size (WxHxD)	mm	127 x 63 x 261mm
MTBF - Telcordia SR-332 issue 3 **	hours	769,670
Warranty	yrs	7

Notes: \* Safety certified for AC input only \*\* 24V output model, 25°C ambient, full load, 230VAC input  
(1) Derate linearly to 80% load from 90 to 85VAC input

## Model Selector

Model	Voltage (V)	Adjust Range (V)	Max Current (A)	Max Output Power (W)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)	Efficiency (typ) % 115/230VAC
CUS1500M-12	12	10.2 - 14.4	125	1500	96	48	150	82 / 85
CUS1500M-15	15	12.8 - 18	100	1500	120	60	150	82 / 85
CUS1500M-24	24	20.4 - 28.8	63	1512	144	96	180	85 / 88
CUS1500M-36	36	30.6 - 43.2	42	1512	216	144	250	85 / 88
CUS1500M-48	48	40.8 - 52.8	32	1536	288	192	300	85 / 88

## Outline Drawing CUS1500M

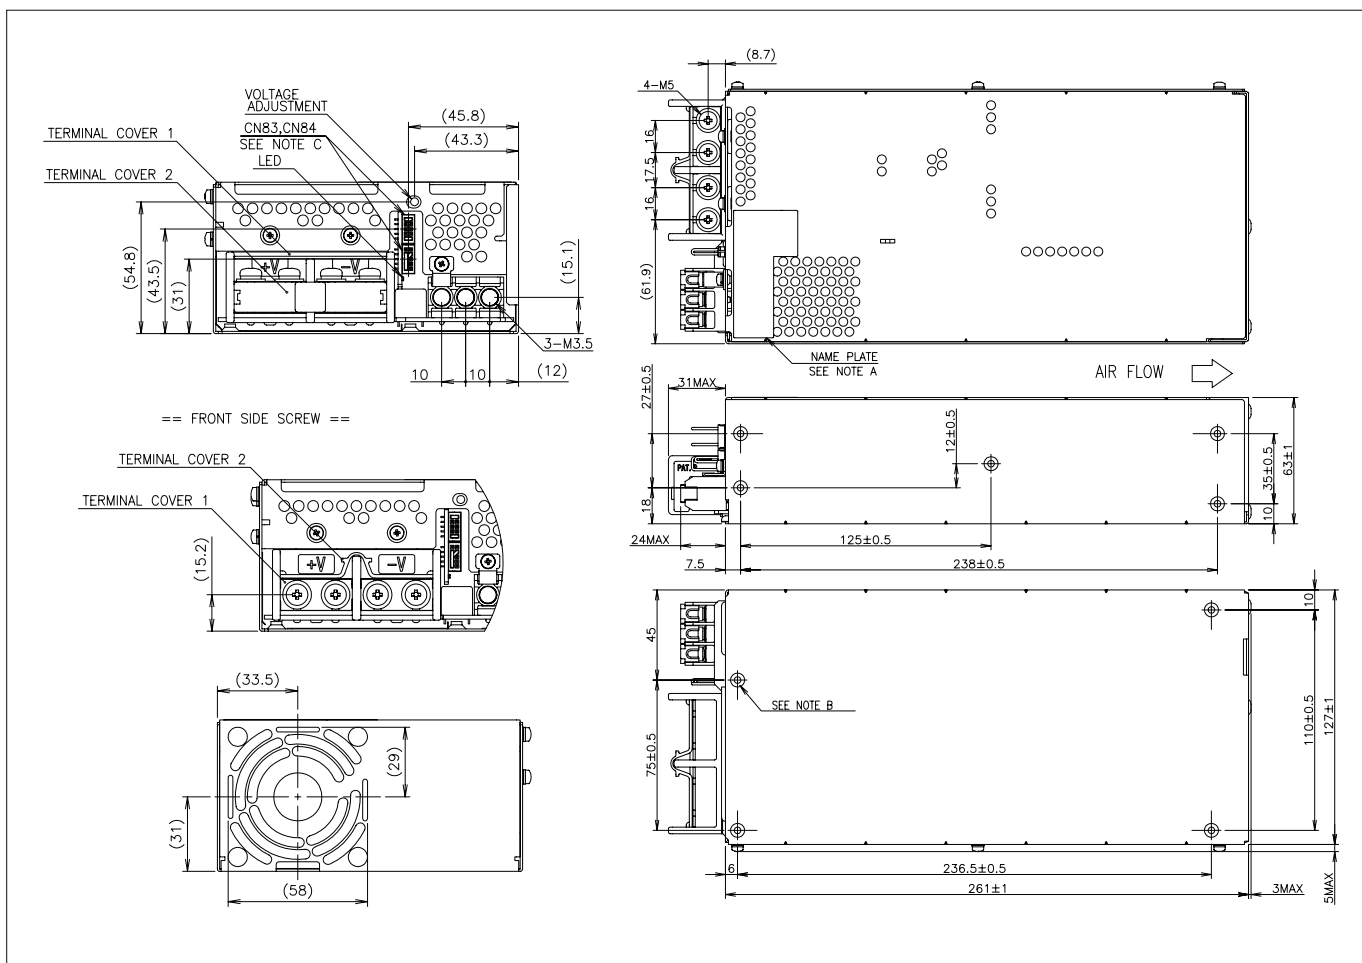

## Options

Suffix	Description
/SF	Single fuse (live line)
/RF	Reverse Fan (Air exits over input/output terminals)
/CO2	PCB coating



## TDK-Lambda France SAS

3 Avenue du Canada  
Parc Technopolis  
Bâtiment Sigma  
91940 les Ulis  
France  
Tel: +33 1 60 12 71 65  
Fax: +33 1 60 12 71 66  
france@fr.tdk-lambda.com  
www.fr.tdk-lambda.com



## Italy Sales Office

Via Giacomo Matteotti 62  
20092 Cinisello Balsamo (MI)  
Italy  
Tel: +39 02 61 29 38 63  
Fax: +39 02 61 29 09 00  
info.italia@it.tdk-lambda.com  
www.it.tdk-lambda.com



## Netherlands

info@nl.tdk-lambda.com  
www.nl.tdk-lambda.com



## TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40  
77855 Achern  
Germany  
Tel: +49 7841 666 0  
Fax: +49 7841 5000  
info.germany@de.tdk-lambda.com  
www.de.tdk-lambda.com



## Austria Sales Office

Aredstrasse 22  
2544 Leobersdorf  
Austria  
Tel: +43 2256 655 84  
Fax: +43 2256 645 12  
info@at.tdk-lambda.com  
www.de.tdk-lambda.com



## Switzerland Sales Office

Eichtalstrasse 55  
8634 Hombrechtikon  
Switzerland  
Tel: +41 44 850 53 53  
Fax: +41 44 850 53 50  
info@ch.tdk-lambda.com  
www.de.tdk-lambda.com



## Nordic Sales Office

Haderslevvej 36B  
DK-6000 Kolding  
Denmark  
Tel: +45 8853 8086  
info@dk.tdk-lambda.com



## TDK-Lambda UK Ltd.

Kingsley Avenue  
Ilfracombe  
Devon EX34 8ES  
United Kingdom  
Tel: +44 (0) 12 71 85 66 66  
Fax: +44 (0) 12 71 86 48 94  
powersolutions@uk.tdk-lambda.com  
www.uk.tdk-lambda.com



## TDK-Lambda Ltd.

1 Alexander Yanai  
Segula  
Petah-Tikva  
Israel  
Tel: +9 723 902 4333  
Fax: +9 723 902 4777  
info@tdk-lambda.co.il  
www.tdk-lambda.co.il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463

info@tdk-lambda.ru

www.tdk-lambda.ru

## Local Distribution

