


Datasheet

M.2 (S80) 3TG6-P series

- SATA III solution for industrial field
- High IOPS
- Excellent random performance
- End to end data path protection
- iData Guard for abnormal power failure
- iCell technology for data protection

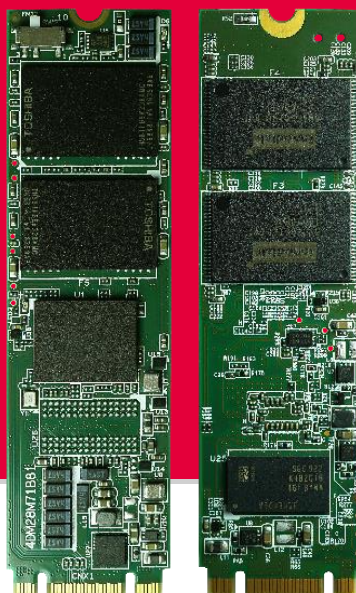

Introduction

Innodisk M.2 (S80) 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. M.2 (S80) 3TG6-P not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

Innodisk M.2 (S80) 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.

M.2 (S80) 3TG6-P series

Contact us for more information
about the M.2 (S80) 3TG6-P.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.


Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi
Dist., New Taipei City 221, Taiwan
Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2021 Innodisk Corporation.
All right reserved. Specifications are
subject to change without
prior notice.

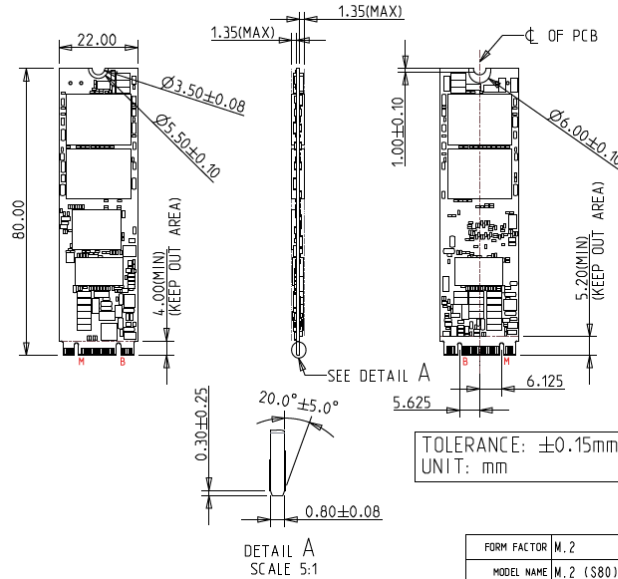

Specifications

| | |
|-------------------------------|---|
| Interface | SATA III |
| Flash Type | 3D TLC |
| P/E cycle | 3,000 |
| Capacity | 128GB~2TB |
| Max. Channels | 4 |
| Sequential R/W (MB/sec, max.) | 510/340 |
| Max. Power Consumption | 3.1W |
| Thermal Sensor | ✓ |
| External DRAM buffer | ✓ |
| H/W Write Protect | ✓ |
| iCell | ✓ |
| ATA Security | ✓ |
| S.M.A.R.T. | ✓ |
| Dimension (WxLxH) | 22.0 X 80.0 X 3.8mm (Max) |
| Environment | Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours |

Ordering Information

| Operation Temp. | 128GB | 256GB | 512GB | 1TB | 2TB |
|-------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Standard Grade (0°C ~ +70°C) | DGM28- A28M71KCBDLP | DGM28- B56M71%*QLP | DGM28- C12M71%*QLP | DGM28- 01TM71%*QLP | DGM28- 02TM71KCBQLP |
| Industrial Grade (-40°C ~ +85°C) | X | DGM28- B56M71GWAQLP | DGM28- C12M71GWAQLP | DGM28- 01TM71GWAQLP | X |

%: G: 96 layers 3D TLC; K: 112 layers 3D TLC / *: PCB version control

innodisk

www.innodisk.com