



MES5300-28GS Series

19-inch 1U Rack Mounting

28-Port Full Gigabit Layer 2 Managed Industrial Ethernet Switch

- Support 28 Gigabit SFP slots
- Support MRP ring network, reconfiguration time < 200ms
- Support multiple network protocols and industrial standards, such as ARP, STP/RSTP/MSTP, ERPS, VLAN, LACP, IGMP Snooping, LLDP, SNMP, etc., support Modbus TCP monitoring instruction of electricity SCADA system
- DC product supports 2 24/48VDC (18-72VDC), dual power supply redundancy, support anti-reverse connection
- AC product supports 2 110/ 220VAC/DC (85-264VAC/77-300VDC), dual power supply redundancy
- Support -40~85°C wide temperature operation, support level 4 electromagnetic compatibility protection, and conform to IEC 61850-3 and IEEE 1613 (substation) standards



质量第一·服务第一·信誉第一

ROBUST INDUSTRIAL CONNECTION

Introduction

MES5300-28GS series products are 28-port full Gigabit layer 2 managed industrial Ethernet switches. This series provides Gigabit SFP slot, and adopts standard rack installation method, which is specially designed for extremely severe electromagnetic interference environment to meet the anti-interference requirements of power monitoring industry.

Network management system supports a variety of network protocols and industry standards, such as ARP, IPv4, MRP, Ring, VLAN, STP/RSTP/MSTP, PTP, ERPS, LLDP, IGMP Snooping, Modbus TCP, QoS, port trunking, port mirroring, etc. It has perfect management functions, supporting port configuration, port statistics, ACL, 802.1X authentication, network diagnosis, rapid configuration, online upgrade, etc. CLI, WEB, Telnet, SNMP, SSH and other access methods can be supported. Network management system could bring you great user experience through its friendly interface design and easy and convenient operation.

The input power supply is two independent power supply circuits which can ensure the normal operation of the device when one power supply fails. When power supply or port has link failure, ALM indicator will be bright and send out alarm, meanwhile, alarm device connected to the relay will send out alarm for rapid scene troubleshooting. The hardware adopts fanless, low power consumption and wide temperature and voltage design, which has passed rigorous industrial standard tests, and suits the industrial scene environment with harsh requirements for EMC. It can be widely used in smart substation, smart grid, energy storage, photovoltaic, wind electricity, non-electric industry SCADA system and other industrial fields.

Features and Benefits

- ⦿ Precision Time Protocol (PTP), provide sub-microsecond synchronization accuracy to meet requirements for high-precision time synchronization
- ⦿ SNMPv1/v2c/v3 is used for network management of various levels
- ⦿ RMON can be used for efficient and flexible network monitoring
- ⦿ Port mirroring can conduct data analysis and monitoring, which is convenient for online debugging
- ⦿ QoS supports real-time traffic classification and priority setting
- ⦿ LLDP can achieve automatic topology discovery, which is convenient for visual management
- ⦿ File management is convenient for rapid configuration and online upgrading of the device
- ⦿ Log management records Console log, RAM log and Flash log
- ⦿ Bandwidth management can reasonably distribute network bandwidth, preventing

unpredictable network status


- ⊙ Port statistics can be used for the port real time traffic statistics
- ⊙ User password can conduct user hierarchical management to improve the device management security
- ⊙ ACL can enhance network flexibility and security
- ⊙ Relay alarm is convenient for troubleshooting of construction site
- ⊙ Storm suppression can restrain broadcast, unknown multicast and unicast
- ⊙ TELNET configuration and SSH configuration guarantee secure access to data
- ⊙ Port Trunking can increase network bandwidth and enhance the reliability of network connection to achieve optimum bandwidth utilization
- ⊙ IGMP Snooping and static multicast can be used to filter multicast data to save network bandwidth
- ⊙ STP/RSTP/MSTP/Ring/MRP could implement network redundancy and prevent network storm
- ⊙ ARP could be used for MAC address resolution
- ⊙ With high reliability and stability, ERPS could avoid broadcast storm caused by data loopback
- ⊙ Network diagnosis and troubleshooting could be conducted via Ping, Traceroute, Cable Diagnosis, SFP Digital Diagnosis

Support Modbus TCP monitoring, which is convenient for various integrated systems to monitor and manage the device status


Dimension

Unit: mm

- MES5300-28GS-2LV

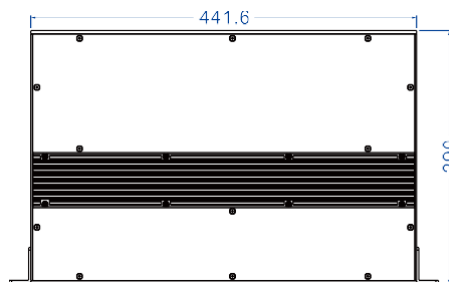

- MES5300-28GS-2HV

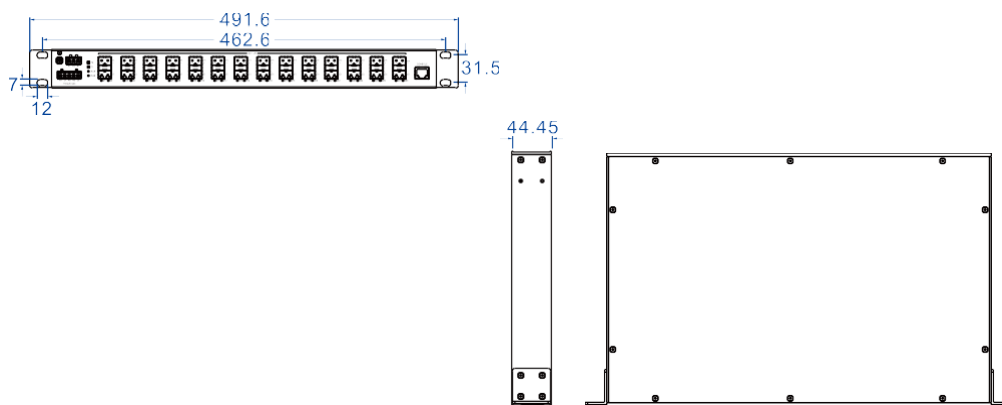

Specification

Standard & Protocol	<p>IEEE 802.3u for 100Base-FX IEEE 802.3z for 1000Base-X IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid Spanning Tree Protocol IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1Q for VLAN IEEE802.1p for CoS IEEE 802.1X for 802.1X Authentication IEEE 802.1AB for LLDP ITU-T G.8032 for ERPS</p>
Management	<p>SNMP v1/v2c/v3, RMON, LLDP, QoS, port settings, port security, dynamic/static MAC address, MAC/IPv4, log report, Modbus TCP monitoring, link flapping protection</p>
Security	<p>Classification of User Permissions, Port and Power Alarm, MAC Security, Port Security, AAA, 802.1X Authentication, RADIUS, TACACS, MAC-Based Authentication, Storm Control</p>
Switch Function	<p>802.1Q VLAN, link aggregation, flow control</p>
Unicast / Multicast	<p>Multicast filtering, IGMP Snooping</p>
Redundancy Technology	<p>STP/RSTP/MSTP, ERPS, Ring, MRP</p>
Troubleshooting	<p>Log record, port mirroring, Ping, Traceroute, network cable</p>

diagnosis, SFP DDM

NTP, PTP

Gigabit SFP: 100/1000Base-X SFP slot, 100M/Gigabit self-adaption
Console port: CLI command line management port (RS-232), RJ45
Alarm port: support 1 relay alarm output, adopt 3-pin 5.08mm pitch terminal blocks, current carrying capacity is 2A@250VAC or 2A@220VDC

Running Indicator, Alarm Indicator, Power Supply Indicator, Interface Indicator

Transmission mode: store and forward
MAC address: 32K
Cache: 32Mbit
Backplane bandwidth: 90Gbps
Switch time delay: <10μs

Adopt 5-pin 5.08mm pitch terminal blocks

- DC Product
2 24/48VDC (18-72VDC), dual power supply redundancy, support anti-reverse connection
- AC product
2 110/220VAC/DC (85-264VAC/77-300VDC), dual power supply redundancy

Operating temperature: -40~85°C
Storage temperature: -40~85°C
Relative humidity: 5%~95% (no condensation)

Available Models	No-load	Full-load
MES5300-28GS-2LV	18.5W@48VDC	36.2W@48VDC
MES5300-28GS-2HV	17.6W@220VAC	40.7W@220VAC

Housing: IP40 protection, metal
Installation: 19-inch 1U rack mounting
Dimension (W x H x D): 491.6mm×44.45mm×290mm

Weight:

- MES5300-28GS-2LV: 5.125kg
- MES5300-28GS-2HV: 5.387kg

IEC 61000-4-2 (ESD, electronic static discharge), Level 4

- Air discharge: $\pm 15\text{kV}$
- Contact discharge: $\pm 8\text{kV}$

IEC 61000-4-4 (EFT, electrical fast transient pulses), Level 4

- Power supply: $\pm 4\text{kV}$
- Relay: $\pm 4\text{kV}$

Industrial Standard

IEC 61000-4-5 (Surge), Level 4

- Power supply: common mode $\pm 4\text{kV}$, differential mode $\pm 2\text{kV}$
- Relay: common mode $\pm 4\text{kV}$, differential mode $\pm 2\text{kV}$

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Authentication

CE, FCC, RoHS, IEC 61850-3 (during authentication), IEEE 1613 (during authentication)

Warranty

5 years

Ordering Information

Model	Gigabit SFP Slot	Power Supply
MES5300-28GS-2LV	28	2 24/48VDC(18-72VDC) Dual power supply redundancy and non-polarity
MES5300-28GS-2HV	28	2 110/220VAC/DC (85-264VAC/77-300VDC) Dual power supply redundancy